




Hygienefilter | Hygienic filter

HFRO

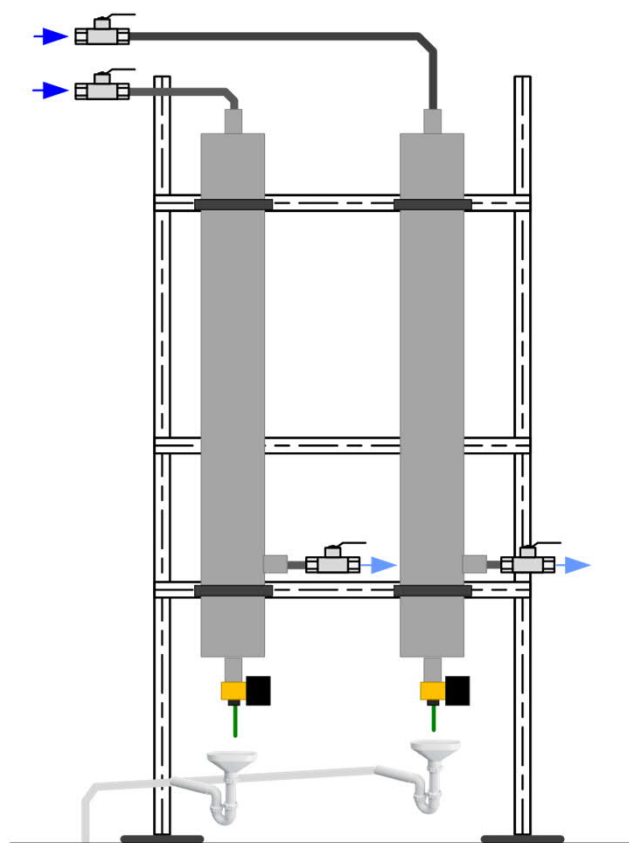


HFRO

Hygienefilter HFRO

Hygienic filter HFRO



Typ Type	HFRO 200	HFRO 400	HFRO 600 Type B	HFRO 1200
Permeatleistung permeate performance	200 l/h	400 l/h	600 l/h	1200 l/h
Gehäusetyp Housing type	Type A	Type A	Type B	Type C
Spannungsversorgung Magnetventil Power supply magnetic valve	230 VAC 6 A	230 VAC 6 A	230 VAC 6 A	230 VAC 6 A
Max. Kapazität Max. capacity	0,5 m ³ /h	0,7 m ³ /h	1,0 m ³ /h	2,0 m ³ /h
Arbeitsdruck bei 16°C working pressure at 16°C	>2-5 bar	>2-5 bar	>2-5 bar	>2-5 bar
Einlauf (a) Auslauf (b) Kanal (c) input (a) output (b) drain (c)	¾" ¾" / ½"	¾" ¾" / ½"	¾" ¾" / ½"	1" 1" / ½"
Umgebungstemperatur max. Ambient temperature max.	1-20 °C 35 °C	1-20 °C 35 °C	1-20 °C 35 °C	1-20 °C 35 °C
Gewicht ohne Wasser mit Wasser Weight without water with water	1,4 kg 2,8 kg	1,9 kg 3,8 kg	2,6 kg 5,4 kg	4,4 kg 10,2 kg

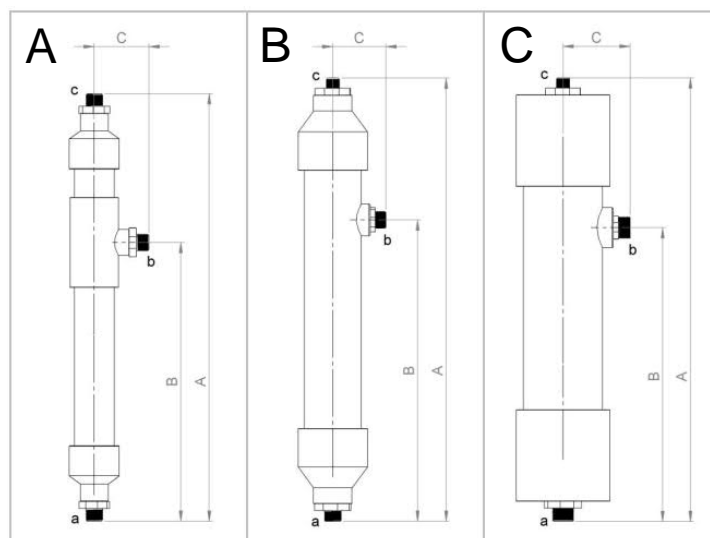

Systemmaße System dimensions				
Höhe Maß A Height meas. A	645 mm	671 mm	881 mm	913 mm
Maß B Meas. B	440 mm	435 mm	672 mm	658 mm
Maß C Meas. C	79 mm	94 mm	84 mm	99 mm

Optionen Options
UV-Reaktor weitere Größen auf Anfrage UV reactor other sizes on request